

EPSON[®]
EXCEED YOUR VISION

Epson
EMP **1815/1810**



Powerful and portable – big performance
in any room



Quality and control wherever you present

Make a serious impact in a fixed setting or on the move with these lightweight 3500 lumen projectors. Set up quickly, project images with amazing Epson 3LCD quality and bring new levels of versatility and style to the way you present.

Epson EMP 1815

Everything you need for a great presentation

- Fast USB connection – no more VGA cables!
- Present directly through wireless or wired networks
- Project 80" images from just 2.4m with 1.6x zoom ratio
- Run up to 4 projectors from one computer for panoramic images, or multi-screen productivity
- Keep file transmission secure with market-leading wireless security

EasyMP™



Epson EMP 1810



Superb presenting made simple

- Work fast with 6 second set up
- Superb quality images with Epson 3LCD technologies
- Incredible 3500 lumens projector packed into just 2.9kg
- Pause presentations easily with AV mute slide
- Direct power off – instant disconnection of power after presentation



Can be ceiling mounted and connected directly to the room's power switch for easy power on/off



Compact and easily portable with soft carry case

Pause presentations quickly with the AV mute slide. It also protects the lens when in transport or storage




Integrate your projector into your local network wirelessly or with cables.

Seamless Network Integration; wireless or wired

Your EMP-1815 projector can be quickly integrated into your local area network with direct RJ45 connectivity. Take full control of your projector remotely, monitor its status, and even project your presentations via the network. And we provide the best projector wireless

security available to ensure that you control access to your data and presentations.

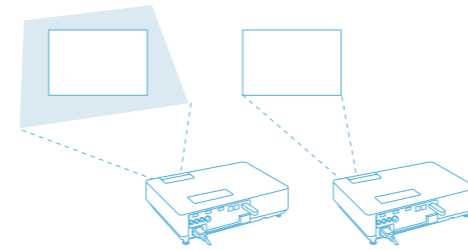


Start presenting quickly with 6 second auto setup.

One button for a perfect image

It takes just six seconds to achieve a super-bright, uniform image. Simply press 'Quick Setup' and the projector will automatically create a perfectly square image for you. Screen frame detection technology automatically fits the image to the screen, and if there's no screen, brightness peak detection gives you

great pictures on a wall. And with super fast shutdown, you can unplug and be on your way as soon as you're finished.

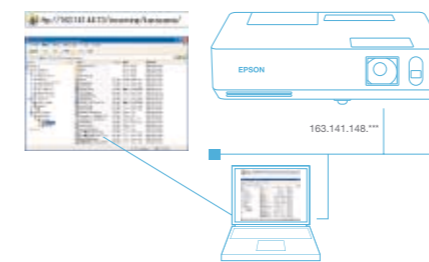

Standalone presenting via the Compact Flash memory card slot.

Compact Flash versatility*

Make standalone presentations or photo slideshows simply and directly with the Compact Flash card reader. When the card is inserted in the projector, you can even rewrite stored information via the local network using ftp. As cards don't need to be removed, this is very useful for ceiling mounted projectors. CF cards

are also an easy way to transport files between venues. You can even plug in the CF card from a digital camera.




Make standalone presentations from a range of memory cards and devices.

PC free flexibility*

Presenting without a PC makes the whole process smoother and simpler. You can leave your PC at home and move around even more easily. In addition to Compact Flash memory cards, you can present directly from a USB memory stick – or even SD, Memory Stick, or MicroDrive media

(with optional adapters). Simply connect your memory device to the CF memory card slot or USB port and you're ready to go.

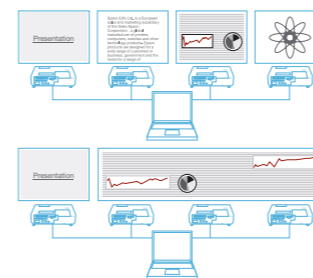

Reach a wider audience with simultaneous display on multiple screens.

Innovative multi-screen display*

Now you have the power to make a really big impact, with up to 4 projectors presenting from just one computer simultaneously, and even wirelessly. Either opt for a large panoramic image, or 4 independent pictures to offer your audience a true multimedia experience.



Simple, fast USB connection to your PC – no need for traditional VGA cables.

Connect to your EMP-1815 via USB

Save even more time by connecting your PC to your projector via the simple USB cable. There's no longer any requirement for the traditional VGA cable, and there's no need to change input and output signals manually either because with USB it's all done for you. The projector



will recognise the signal and start projecting automatically.

* On EMP-1815 only

MODEL	EMP-1815	EMP-1810
Projection system	0.8" with MLA (x3) D5 TFT	
Native resolution	XGA (1024x768)	
Brightness	3500 ANSI lumens/2700 ANSI lumens (Low Brightness Mode)	
Contrast	500:1	
Weight	3.1 kg	2.9 kg
Dimension (D x W x H)	257x 345x 86mm (Excluding Feet)	
Fan noise	High brightness/Low brightness mode 37 dB/32 dB	
Projection lens	Manual Focus and 1.6x Manual Zoom, F= 1.75-2.42/F= 24.0-38.2mm	
Lamp	Type/life 210W UHE/3000 hours (2500h at high brightness mode)	
Screen size (Projected distance)	30 to 300 inch (0.8 to 14.7m)	
Colour	Full-Colour (16.77 million colours)	
Keystone correction	Vertical: -45 to +45 degrees Horizontal: -30 to +30 degrees	
Quick setup	Auto Quick Corner Approximately 6 seconds	
Compatibility	UXGA/SXGA/SVGA/VGA	
Input	Video D-sub 15-pin x2, RCA x1, S-Video x1	
	Computer RGB x2	
	Audio Stereo mini-jack x2	
Output	Computer D-sub 15-pin x1	
	Audio Stereo mini-jack x1, 5 W speakers	
Control	RS-232C and USB Type A x1 and Type B x1 RS-232C and USB Type B x1	
Network	Yes	No
Card slot	CF x1 (3.3V)	No
Operating temperature/altitude	5 °C to 35 °C/0 to 2,286m	
Power supply	100 - 240 V AC ±10%, 50/60 Hz	
Power consumption	100 - 240 V AC 3.4 - 1.5 A 50/60 Hz	
Other functions	Direct Power On/Off, Instant Off (Cool-Down Period), Source Search, Auto Detection of RGB, Multi-Screen Colour Adjustment, Operation Panel Protected Function, 6 Colour Modes and 1 Customized, High Altitude Mode, User's Logo, A/V Mute Slide, Theft Proof, Kensington Lock	
OSD language	20 languages	

Wireless performance EMP-1815

Network	Function
	Wireless LAN (802.11a/b/g) Projector control and projector management via network SNMP PC Free Network Presentation (Network and USB) Web control PJ-Link Transferring or writing files to memory card EMP IP Link (for Windows) Web download
	Software EMP Monitor (for Windows) EMP NS Connection (for Windows and Mac) EMP Slide Maker2 (for Windows)
	Security (Wireless LAN) WEP, WPA-PSK(TKIP), WPA2-PSK(AES) EAP-TLS, EAP-TTLS/MD5, EAP-TTLS/MS-CHAPv2, PEAP/MS-CHAPv2, PEAP/GTC LEAP, EAP-Fast/MS-CHAPv2, EAP-Fast/GTC

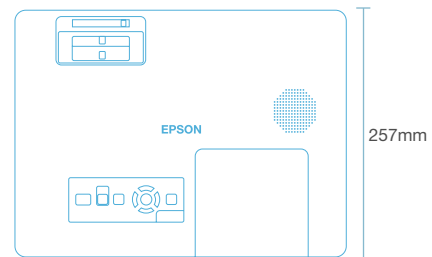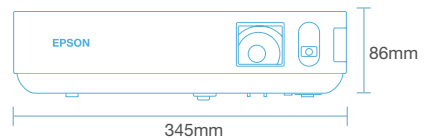

Epson EMP-1810 connectivity



Epson EMP-1815 connectivity

Supplied accessories

Power cable	3 m
Computer cable	1.8 m D-sub 15pin (Male) - D-sub 15pin (Male)
USB cable	1.8 m (only 1815)
Soft carrying case	attached
Wireless LAN unit	attached 802 11a/b/g (WN6501CEP) (only 1815)
Screw	2 x 8 mm (for fixed Wireless LAN unit) x1 (only 1815)
Bundled software	Epson Projector software for meeting & presentation (CD-ROM) (only 1815)
Password protect sticker	attached
User's manual set	attached



For further information please contact your local Epson office or visit www.epson-europe.com

Austria 0810/20 01 13 (0,07 €/Min.) Belgium 070/350120 (0.1735 €/Min.) Czech 800/142 052 Denmark 44 50 85 85 Finland 0201 552 091 France 0892 899 999 (0,34 €/min) Germany 01805/23 41 10 (0,12 €/Min.) Greece 210-8099499 Hungary 06800 147 83 Italy 02-660321 10 (0,12 €/Min.) Luxembourg 900/43010 (0,24 €/min.) Middle East +9714 8818934 Netherlands 0900-5050808 (0,05 €/oproep + 0,15 €/Min.) Norway 22 06 42 80 Poland 0-0-800 4911299 (0,16 z/min.) Portugal 707 222 111 Russia (095) 777-03-55 Slovakia 0850 111 429 South Africa (+2711) 465-9621 Spain 93 582 15 00 Sweden 0771-400135 (Mobilsamtal - 0,99 kr/min, Lokala samtal - 0,30 kr/min, Utlandssamtal - 0,89 kr/min) Switzerland 0848 448820 (4-8 cent./min.) Turkey (0212) 3360303 United Kingdom +44 (0) 1442 261144

Entity carrying out management and coordination pursuant to article 2497 bis of Civil Code: Epson Europe BV

EPSON® is a registered trademark of Seiko EPSON® Corporation. All other product names and other company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice.

EPSON®