

VADDIO™ PREVIEW™ QUAD 4 LCD RACK MOUNT MONITOR

PreVIEW Quad 4 (Part Number 999-5500-004)

PREVIEW QUAD 4 OVERVIEW

The Vaddio PreVIEW Quad 4 LCD Rack Mount Monitor features four 4" (10.16cm) high resolution active matrix LCD Monitors for exceptional video clarity and color handling. The PreVIEW Quad 4 is a simple and straight forward four LCD rack mount monitor without controls for previewing general shots and areas without the need for extreme detail.

All four of the 480 x 234 resolution LCD panels on the Quad 4 have their own input and amplified loop through on BNC connectors for ease of configuring video production systems.

Constructed of heavy gauge aluminum and steel, the enclosure is both tough and attractive and can be tilted $\pm 25^\circ$ for setting up optimum viewing angles. The PreVIEW Quad 4 is set-up for auto recognition of NTSC and PAL video formats and unlike many of the rack mount LCD monitors available today, the Vaddio PreVIEW Monitors are both FCC and CE certified. The price/performance and overall value of the Vaddio PreVIEW Series LCD Rack Mount Monitors is unmatched in today's market.



Figure 1:
PreVIEW Quad 4 (top) 2RU enclosure is FCC and CE certified and carries the FCC and CE marks.

WHAT'S INCLUDED

Each PreVIEW Quad 4 system contains the following items: One (1) PreVIEW Quad 4 Rack Mount LCD Monitor, One (1) 12 VDC, 3.8 Amp Power Supply, AC Cord Set with US type and Euro type connections and Documentation.

PreVIEW Quad 4 - Front Panel tilted up approx 5° (simulated video feeds)
Photographs courtesy of Lehto and Wright featuring Matt Jacobs (lehtoandwright.com)

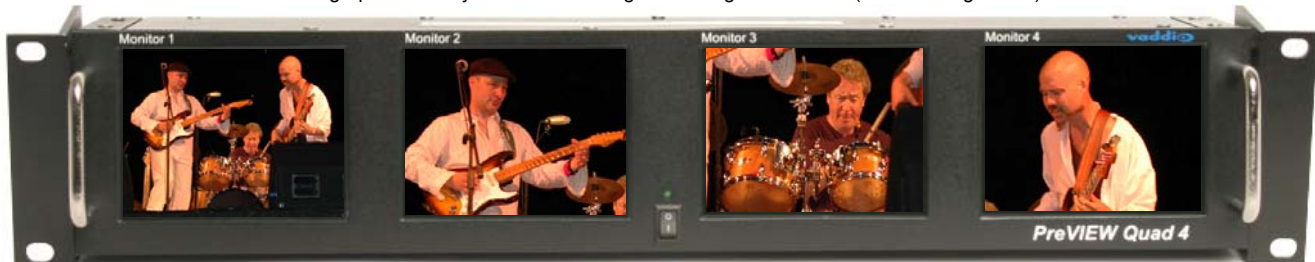


Figure 2: Front panel of PreVIEW Quad 4 with handles for positioning and master on/off switch.



Figure 3: Back Panel of PreVIEW Quad 4 showing 2-BNC connectors (in & out) per LCD and power connector.

TECHNICAL SPECIFICATIONS

Specification	Vaddio PreVIEW Quad 4 LCD Rack Mount Monitor
Displays	Four (4), 4" Diagonal LCD Panels
Panel Resolution	480 x 234
Active Area	8.21cm x 6.18cm
Dot Pitch	0.171mm x 0.264mm
Brightness and Contrast Ratio	250 (cd/m ²), 350:1
Video Signals	NTSC & PAL, auto-recognition
Video Inputs	Four (4) on BNC Connectors, 1 V p-p, 75 ohm
Video Outputs	Looping Outputs (active components) on four (4) BNC Connectors
Dimensions	19.125" (48.58cm) W x 3.5" (8.89cm) H x 2.75" (6.985cm) D
Front Panel Controls	One Master On/Off Switch for all four (4) monitors with integrated Green LED
Compliance	FCC and CE (carries both marks)